


Nistar – Pitot Tubes

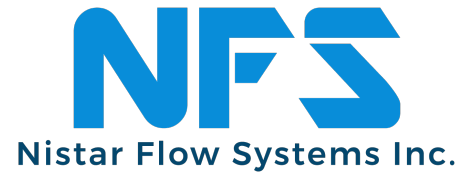

Accuracy: $\pm 1\%$ uncalibrated, $\pm 0.5\%$ calibrated w/ Tx

Repeatability: $\pm 0.1\%$ of rate

Process temperature: Up to 1100 °F

Pressure Rating: Up to 1500psi

Minimum Reynolds Number: 50,000

Permanent Pressure Loss: 5% of DP Max

Turn Down Ratio (TDR): Typical 10 to 1

Maximum Viscosity: 100 cP

Low cost installations
Hot Tap available
Very low pressure loss
Higher with Stacked Tx